




## Seo-NTN Driveshaft USA CORP.

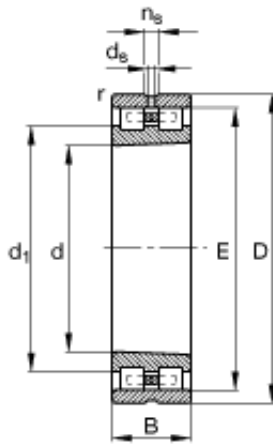

60 mm x 95 mm x 26 mm FAG NN3012-AS-K-M-SP cylindrical roller bearings

Bearing No. NN3012-AS-K-M-SP

NN3012-AS-K-M-SP Bearing 2D drawings and 3D CAD models

Size	60x95x26 mm
Bore Diameter	60 mm
Outer Diameter	95 mm
Width	26 mm
d	60 mm
D	95 mm
B	26 mm
$D_{a \max}$	89 mm
$D_{b \min}$	87 mm
$d_1$	73,3 mm
$d_{a \min}$	66 mm
$d_s$	3,2 mm
E	86,1 mm
$n_s$	4,8 mm
$r_{a \max}$	1 mm
$r_{\min}$	1,1 mm
s	1,9 mm / Axial displacement facility from central position
m	0,674 kg / Weight
$C_r$	75000 N / Dynamic load rating (radial)
$C_{0r}$	110000 N / Static load rating (radial)
$n_{G \text{ Fett}}$	8500 1/min / Limiting speed for grease lubrication



## Seo-NTN Driveshaft USA CORP.

$n_{G\ OI}$	10000 1/min / Limiting speed for minimal quantity oil lubrication
$C_{ur}$	17200 N / Fatigue limit load, radial